

# Mechanical Fixture Kit

## MFT-D4 SERIES


Equip **ND-MFT-D4-EXCH-PYL** Mechanical Fixture



**W** with Alum-A-Grip Handles  
**640 mm**  
 [25.196]  
**729 mm**  
 [28.701]

**H**  
**280 mm**  
 [11.024]


**D**  
**584 mm**  
 [22.992]

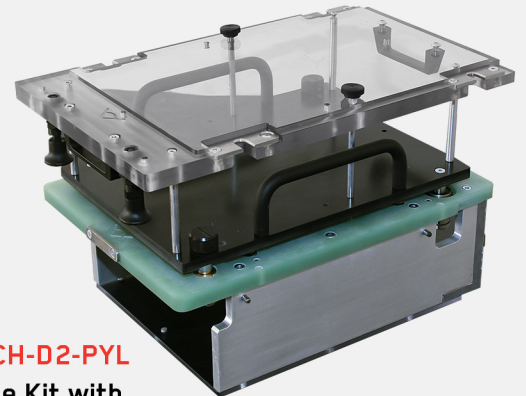

Equip **ND-EXCH-D2-PYL**  
 Exchangeable Kit with  
 Pylon Interface

### Technical Features:

- External Dimension (width x deep x height) with Handles: 729 mm x 584 mm x 280 mm [28.701 in x 22.992 in x 11.024 in]
- Usable Area For One Exchangeable Unit: 133mmx218mm [5.236in x 8.583in]
- Two Independently Operated Cover Units
- Big inner space for Optional Hardware
- Ergonomic Handle for easy closing
- ESD Safe & Easy Maintenance
- Quick Exchange System - Modular Fixture
- Alum-A-Grip Handles for transport and lift

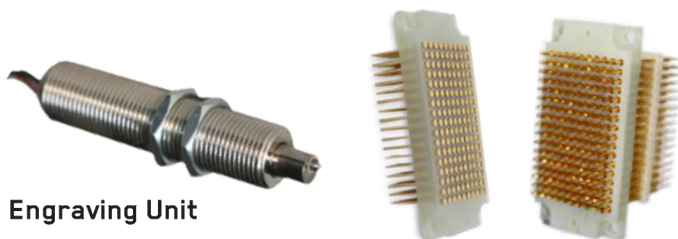

Engraving Unit

170 Pole Pylon Block

### Optional Hardware for Fixture Customizing:

- Reed Relay Switch used as cover close sensor
- MU S001 D2 M12 x 1 PCB Engraving Unit
- CEM-1 Assembly Plate to Fixture housing bottom
- Digital Test Cycle Counter
- Safety Switch for High-Voltage Test
- Inductive Sensor to check Handle Position (to control actuation of safety switch)
- Pneumatic or Solenoid Cover Lock set

\*If standard 2 N Test Probes are used

